




REFER TO DETAIL SV-2 FOR VALVE BOX,  
RISER, CONCRETE COLLAR, AGGREGATE  
BASE, ASPHALT, AND RELATED DETAILS

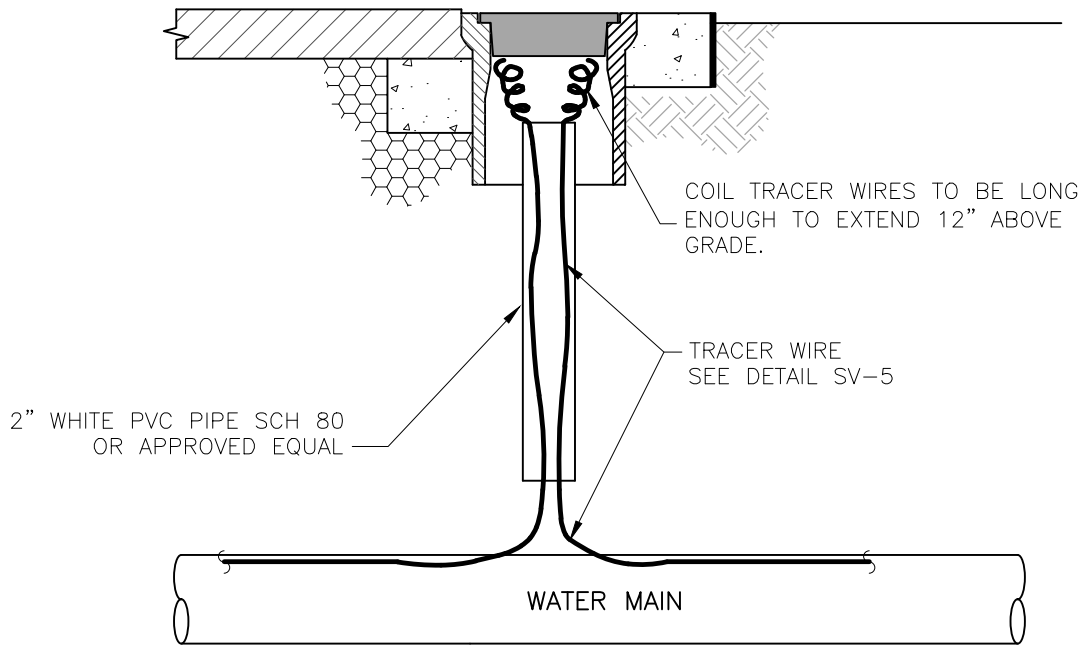

NOTES:

1. TEST STATION SHALL BE INSTALLED AT MINIMUM 500 FOOT INTERVALS WHEN ACCESS TO TEST WIRES IS NOT OTHERWISE AVAILABLE THROUGH VALVE RISERS OR OTHER MEANS.